

ASSEMBLING YOUR OWN NASCAR MICRO CARS



Coin




You will find 25 punch-out NASCAR® Micro Cars on pages 5-14. The wheels, axles, and foam-tape squares are in the envelope located inside the back cover of this book.



You will need a small coin for each car. The coin gives your car more weight and traction. Position the coin between the axle holes, so that the axles will not rub against the coin when the car is assembled.




MICRO HINT: For better rolling, try to remove the excess plastic from the punched-out wheels.

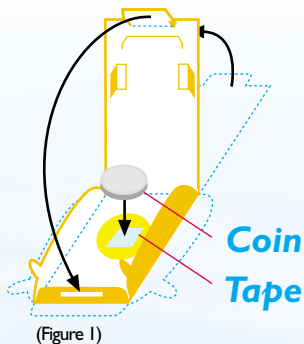

(Figure 1)

1. Carefully punch out a car body. Fold up and crease along all the dotted lines. Remove the backing from a tape square (provided) and stick the square where it says “tape.” Position a coin in the circle between the axle holes and press it down onto the tape square (Fig. 1).

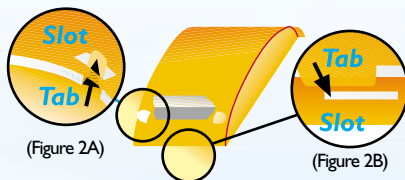


(Figure 2A)

(Figure 2B)

(Figure 2)

2. Bend the top of the car over the sides, and insert the side tabs into the slots on the top (Fig. 2A). Insert the tail tab all the way into the tail slot (Fig. 2B). Bend up the spoiler in the back. Bend the side tabs toward the sides of the car (Fig. 2).

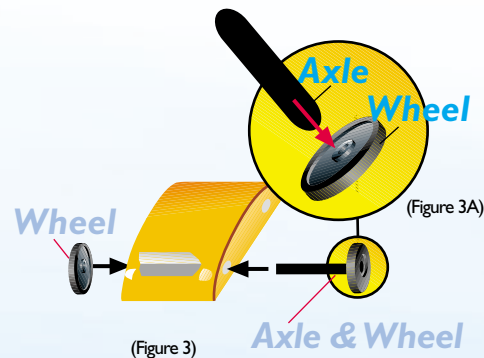

(Figure 3)

(Figure 3A)

Axle & Wheel

3. Carefully detach two axles and four wheels from the sheet of plastic parts. Carefully press one wheel onto each axle (Fig. 3A). Insert the axles through the holes in the car. Press on the remaining wheels (Fig. 3). Your NASCAR Micro Car is ready to roll!